


ARTECH Qkids

Auto broadcasting System For Children





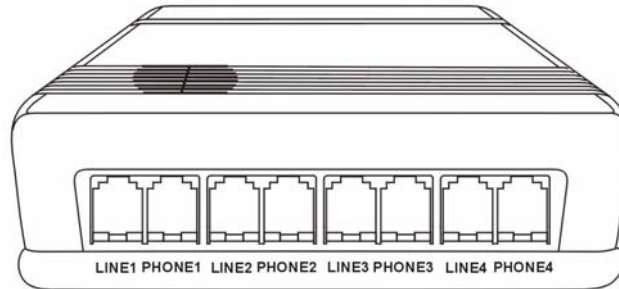



Terms of Condition

All contents, accessories, software and the product (refers to QKids) included in this package are the property of Artech Ltd., Taiwan. Unauthorized copy, reproduce and resell of this product are prohibited and will take to law action. This user's guide does not (and is not intended to) responsible for any reception lost during the call or any possible events cost you (refers to the user) or damage/profit-effect to your business and equipments. Artech Ltd. and all of its employees are also not responsible for any of the incident described above. All of the information printed in this users' guide are subject to change and are only for your own reference. Artech Ltd. remains the rights to change any contents, pictures, and text copy without notice. Any failure or error occurs in this users' guide, hardware and software will not be responsible by Artech Ltd. whatsoever.

© 2006 Artech Ltd. Taiwan All Rights Reserved.
 Name of Product: Qkids Auto broadcasting system
 Printed Revision: 1.0.0
 Date of Published: January 2006

Operational Warning and Notice

	<p>1. Place product away from dusty or massed area. The dust often affects and result product shortness.</p>
	<p>2. Get away from any magnetic area (e.g. Speaker or TV) to prevent magnetic interference.</p>

	<p>3. Do not place the product under the sunlight. °</p>
	<p>4. Do not place the product under temperature of 0C or 30F; or over temperature of 50C or 122F. These temperatures will affect the switch and will not be able to operate normally.</p>
	<p>5. Prevent from getting liquid, water or under vapory environment.</p>
	<p>1. Turn off your product before you do cleaning. Clean without any liquidized oil or cleaner.</p>
	<p>2. Maintain the product under a dry environment. Any vapory or liquids will shorten the circuits inside switch.</p>
	<p>3. DO NOT open the switch at any circumstances. Unauthorized open or disassemble the product will occur failure of machine operation and your product's warranty will be terminated.</p>

	<p>4. If you are experiencing the following situation(s), please TURN OFF the power and contact our Repair Center immediately:</p> <ul style="list-style-type: none"> ● Impair of power cables ● Has liquid emerge <p>Breakage of case due to accident dropping</p>
--	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

3. Others:

- All of included accessories, user's guide, cables, and CD/software is NOT under warranty and will not replace at all.
- All warranties are covered in world-wide. Please refers to World-wide Warranty and its terms at <http://www.artech.com.tw>

Details of Warranty

This product is covered by one year warranty from the date you purchased. If in a normal circumstance without user's failure of operation or breakage, the product will be covered in full-warranty. If in any other circumstances list in the following, a repair fee will apply to you:

1. if the defeated product is caused by a natural calamity or power outage/pressure
2. if the defeated product is caused by unauthorized open/disassemble or change of circuit specification from other resources than AT
3. accidental dropping by users' act of moving or displacing the product
4. if the defeated product is caused by use the product for other purpose other than it was original design

Product Warranty

This product has made a series of quality control tests and exams by Artech, Ltd., Taiwan (refers to AT). If by a normal circumstances the product is defeated without users' failure of operation or breakage, the product is covered by its warranty and will be repaired by AT.

Warranty Terms:

1. Hardware failure: The product is covered by the full-warranty (free charge of repair) without user's failure of operation or breakage.
2. Software: Application program and CD driver will be provided from us, if you install any others program, it will not belong to servicing range.

Content

Introduction..... 1 System supporting 1

System Requirements	2	Incoming messages of unregistered numbers.....	17
Product hardware appearance and function	2	Flashing prompt of new incoming calls.....	18
Install hardware.....	3	Reminding voice of system ON and OFF	18
Install power and cable.....	3	Record broadcasting contents of Announcement	19
Install line and phone.....	3	Set Contents of paging and play sequence	19
Install microphone and amplifier system	3	Voice settings for starting and finishing broadcasting.....	20
Install Qkids Application Program	4	Set system transmitting port(Comport)	20
Install Other items of CD	4	Set Qkids system auto run when windows start	20
Install software.....	4	Set time schedule for system starts and finished.	21
Remove software.....	5	Clear all voice paths of system	22
Starting to use	6	Test voice contents of students.....	23
Opening QKids	6	QKids Auto Paging Mode.....	23
Main menu function introduction	6	Set auto paging mode.....	23
Create file for system info.....	7	QKids Auto Paging Mode.....	24
Create class name info.....	7	If one parent have two or more children go to the same	
Create info for parent's relationship.....	9	kindergarten	25
Create student's info	10	When parents pick up their children in kindergarten.....	26
System info processing.....	13	If you wanna to second broadcasting for that student	28
Picking up broadcasting records input and output	13	Qkids Manual Paging Mode.....	29
Clear picking up records.....	14	Set Manual Paging Mode	29
Input and output of student's info	14	Using Manual Paging Mode.....	30
Search student's information.....	15	When parents pick up their children directly	32
Modify student's information.....	15	If one parent have two or more children go to the same	
Delete student's info	16	kindergarten	34
System function settings.....	16		
Ring settings when incoming calls	16		
Mode settings for auto paging and manual paging	16		
Open prompt of incoming calls in manual paging mode ...	17		

Contact ARTECH:

ARTECH Head Office (Taipei)

Address: 3F, No.8, Lane 263, Chong Yang Road, Nan Kang Dist., Taipei, Taiwan

Phone: 886-2-2785-2954

Fax: 886-2-2786-2783

Email: sales@artech.com.tw

Service Time: Monday to Friday (AM9:00~PM:6:00)

Web Info: www.artech.com.tw

Filiale(ShenZhen)

Address: 5F, Building NO.2 , PengFengFa Indtil. Zone, 175 Industrial East RD, LongHua Town, BaoAn Dist., ShenZhen, China

Phone: 86-755-1774-6130

Fax: 86-755-2774-6141

Email: szoffice@artech.com

T. Solutions. Co., Ltd. (Bangkok)

Address: 68-68/6, Room 207, S&B Tower, Pun Road, Silom, Bangkok, Bangkok 10500

Phone: 66-2-637-6996

Fax: 66-2-637-6969

Email: info@tsolutions.co.th

Comsolutions Sdn. Bhd.(Kuala Lumpur)

Address : 3-1-4, Block B, Megan Corporate Park, Jalan 1/125E, Desa Petaling, 57100 Kuala Lumpur

Phone: 60-3-9059-1600

Fax: 60-3-9059-2300

Email: info@mycomsolutions.com

Profile

Introduction

Thank you for using auto paging system for children of ARTECH company, Qkids is used to reduce waiting time for parents to pick up their children. In normal situations, when parents to pick up their children, they will come across some problems, such as traffic blocking or parking, etc. Because of waiting time so long, it will cause inconvenience to parents. After you used Qkids system, as long as 5 minutes before parents arrived in kindergarten (Various places have various situations) to dial special line via mobile, after 2 beep voice you can hang up handset, then PC software will justify which parents want to pick their children up according to incoming calls and startup amplifier system for broadcasting. At this situation teacher will prepare something for their children. When parents arrived in school they can pick up their children directly and can economize waiting time for children. You don't need to do other operation, as long as open software on computer and after time is ok, the program will auto run and auto broadcasting, so it is very convenient for management. Moreover, system do not need to receive calls from incoming calls of parents so that can economize phone billings. If there have no broadcasting in kindergarten, you also can know which parents want to pick up their children via reminding on computer software screen. Therefore, installing this system will bring out more efficient service for kindergarten and it will be a great help as a special feature to recruit students for kindergarten.

System supporting

Qkids Main Board

1. **Four line**-Can connect four line, if have new incoming calls are detected will display its info on PC software.
2. **Multi-System**-Support various CID format, such as

DTMF、Bellcore FSK as well as ETSI FSK, etc. It can be used all over the world.

QKids Application Program

Auto broadcasting and manual broadcasting mode

If kindergarten have broadcasting system, you can connect broadcasting system to computer voice output port. If there have incoming calls from parents, the system will auto broadcast student's info. If kindergarten have no broadcasting system can get incoming calls numbers via PC software so that can make a preparation by manual for children via exchange system

Auto startup and manual startup

System can set day for class (From Monday to Sunday) to auto startup and auto close time, or manual opening system by teachers. If settings is auto startup, system will auto startup if setting time is ok for receiving calls from parents. Beyond setting time will auto close system.

Parent's relationship corresponding

Each student can set 6 parent's phone numbers. If incoming from parents will display some info on PC software, such as class, name as well as relationship for students. Teacher can browse which parents will come to pick up their children.

Two language name

Each student can enter Chinese name and English name and can select Chinese and English for recording and broadcasting.

Select broadcasting contents by yourself

Each kindergarten can set broadcasting contents, such as Starting voice, class, Chinese name, English name, reminding contents, finishing voice and can record reminding contents and define broadcasting sequence.

Incoming calls/Broadcasting/Received records

You can see incoming calls time of parents from broadcasting database whether need to inform via broadcasting and pick up.

Broadcasting in sequence

When there have more incoming calls, system will auto store info and play in sequence and will not lost any info of incoming calls. When one parent have two or more children in the same kindergarten that only using one call will auto play names of all children in sequence.

System Requirements

Pentium 400 MHz CPU以上

Windows98se/XP/2000/NT operating system

50MB or more memory

128 MB RAM


With voice card

Standard RS-232 transmit port

Need configure amplifier system if through amplifier system

Product hardware appearance and function


<Front View>

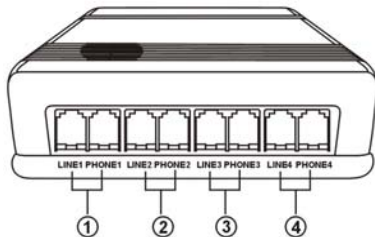

1. RJ-11 Line 1/ Phone 1 Jack
2. RJ-11 Line 2/ Phone 2 Jack
3. RJ-11 Line 3/ Phone 3 Jack


4. RJ-11 Line 4/ Phone 4 Jack

<Back View>

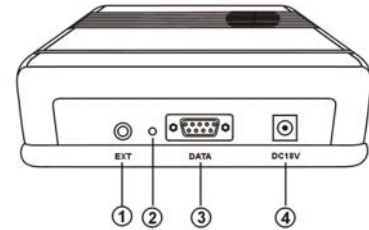

1. External voice Jack
2. Message indicator
3. RS-232 Com Port Jack
4. DC18V power input

<Bottom View>

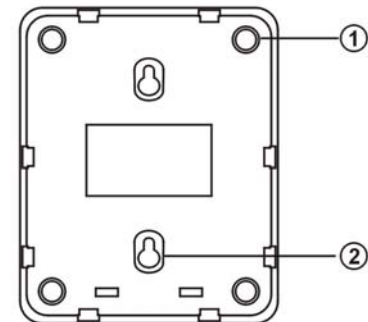


1. Cushion
2. Hanging hole

Install hardware

Please install Qkids auto broadcasting system according to below instruction.


Install power and cable

1. Put RS-232 cable to insert system COM port.
2. Put RS-232 cable to insert PC COM port.
3. Put power adaptor to insert system DC port.
4. Put power adaptor to insert power Jack.

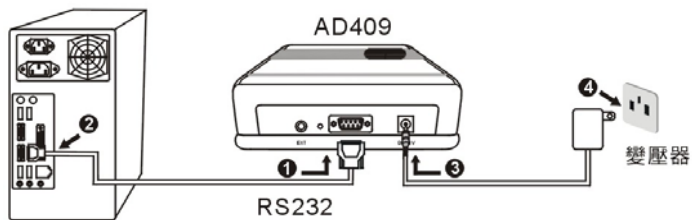


Install line and phone

1. Put line to insert phone line Jack.
2. Put phone line to insert system PHONE1 Jack.
3. Put another phone line to insert PSTN Jack.
4. Put phone line another port to insert system LINE1 Jack.

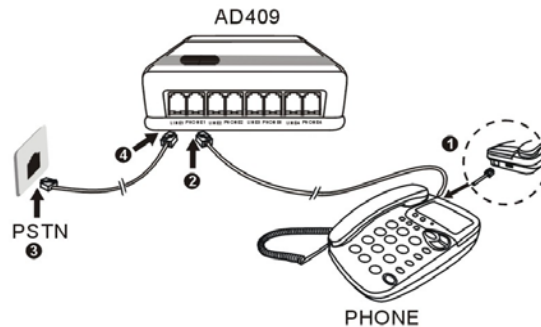

Install microphone and amplifier system


1. Put system microphone Jack to insert PC voice Jack.
2. Put system AV line to insert PC voice output Jack.
3. Put AV line another port to insert amplifier system input AUX Jack.

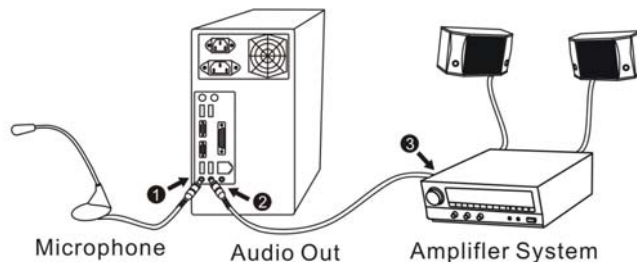

Install Qkids Application Program

This product include Qkids application program of PC software, you must install the program on you computer.

1. Put driver and application program of CD to CD-Rom.
2. Click tab "Install Qkids (forEnglish/Chinese OS)" (Support Chinese and English display)
3. Or click tab "Install Qkids (forEnglish/Thai OS)" (Support English and Thailand display)
4. Please install program by reminding info

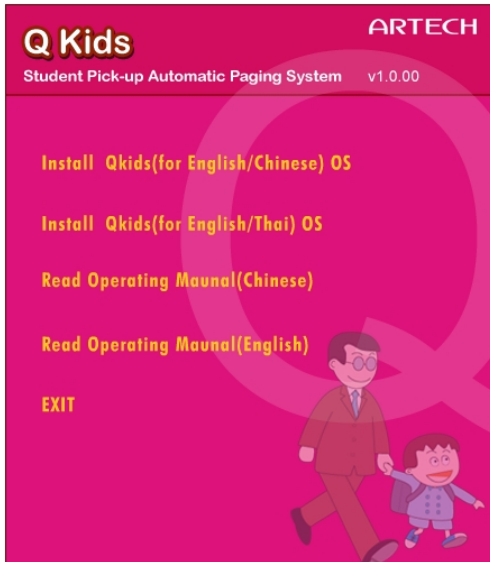


! If CD can not auto run to browse contents of CD to run Setup.exe program.

Install Other items of CD


1. Read Operating Manual(Chinese): Click this tab to search Chinese installing instruction.
2. Read Operating Manual(English): Click this tab to search English installing instruction.
3. EXIT : Click this tab to exit installing operation.

Install software


1. During installing process to click [Next] button to enter next process.

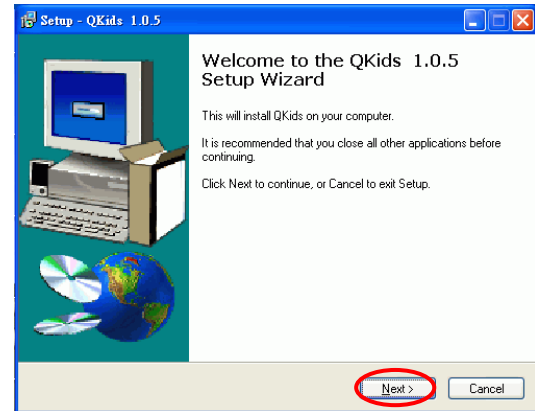


2. Click [Next] button to enter next process.

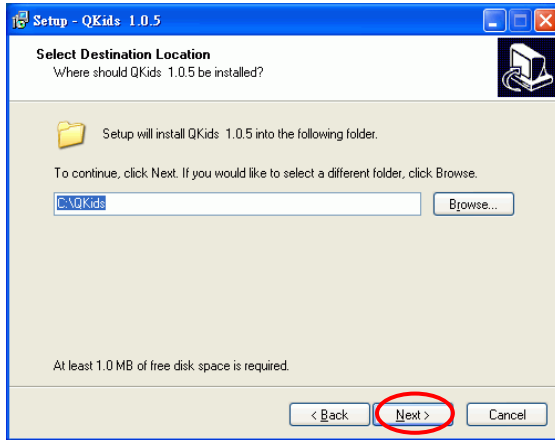

3. Click [Install] button to enter next process.

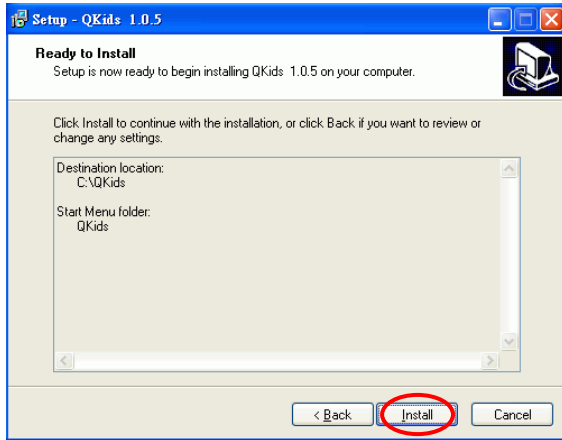


4. Click [Finish] button to finish installing.

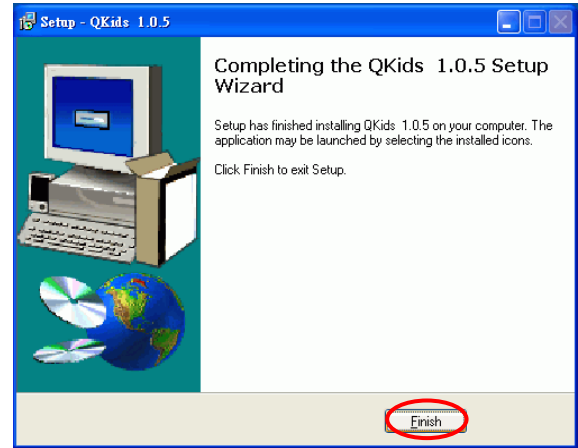

Remove software

1. Click [Start] button of system to enter[All Programs] to enter[ARTECH] info, then to select [Qkids] and click [Uninstall] option to remove application program of Qkids.
2. Please remove program by reminding info.
3. After running program, click[(Y)] to enter next process.

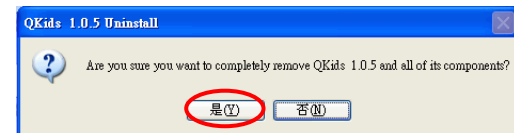


- Click **[Confirm]** button to finish removing program.



Starting to use

This chapter will introduce how to use Qkids, set functions as well as finishing to use Qkids.

Opening QKids

- Open Qkids program, Please on system to select [Start]>[All Program]>[Qkids]>[Qkids].
- Or to click shortcut picture  on desktop to open Qkids program.
- The first thing is to create new info when you use on the first time, include Class, Relationship of parents, Student information, etc. Moreover, to record voices for class name, Local Name as well as English Name.
- Then to set function for system, due to Qkids have various compatible environments, you can select your required mode in terms of different broadcasting. Whatever which broadcasting environment, Qkids can be used in anyway. Now let us to experience fantastic function of Qkids !

Main menu function introduction

- ON/OFF : System open and close.
- Ring All / Only Unregistered : Select all incoming calls to ring on or unregistered numbers.


- Auto Paging / Manual Paging : Broadcasting for incoming calls via auto broadcasting or manual way.
- Scheduled : System timer startup status indication ; Red on stand startup, White on stand disable startup function.
- Qkids minimize window button
- Qkids close program button
- Paging Log : Broadcasting and picking up status log
- Database : Info page of students
- Option : System functional settings page
- Hardware connecting status
- System pause broadcasting button




Create file for system info

Create class name info


1. First to click 【Options】 button





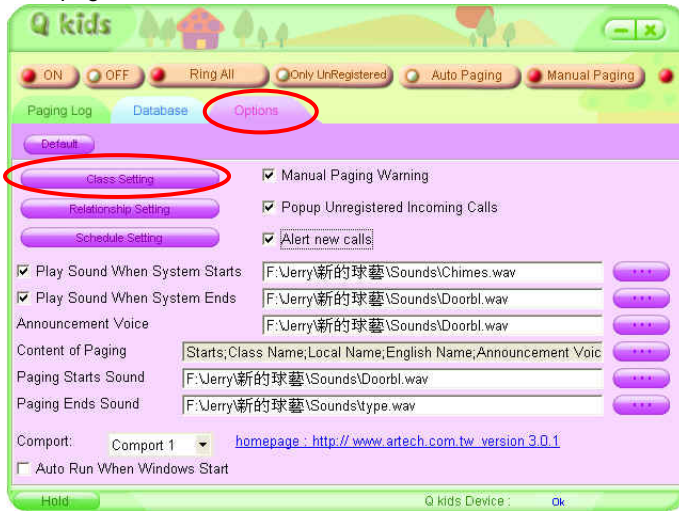


2. After entering 【Options】 page to enter [Class Setting] page to create class information

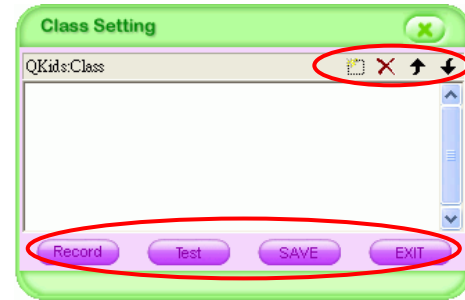


3. After entering lass Setting] page as shown in below
Window introduction like following:




-  : Add class
-  : Delete class
-  : Up shift class sequence
-  : Down shift class sequence
- [Record] : Recording for class name
- [Test] : Recording test for selected class name
- [SAVE] : Save recording info and exit window.
- [EXIT] : Exit Class Setting window


4. Click  button to add class name

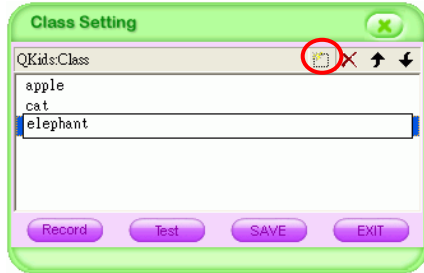

5. Add all classes to record step by step to click [Record] button to enter recording page

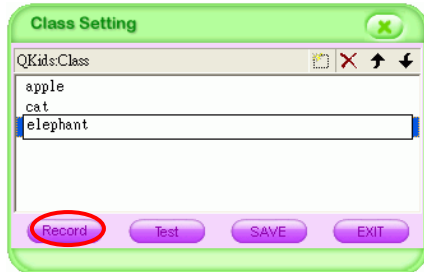

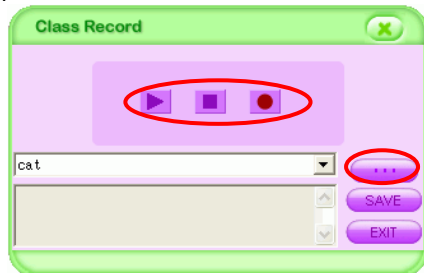

6. After entering recording page will popup a message for operation



 : Start recording


 : Stop recording

 : Play recording info

 : Import previous voice page

! Cautions: After recording 1 class over to click [Save] button to record for next class.

7. After recording all classes, don't leave at once, you can select each class and click [Test] button to test for recording results, after testing ok to click [Exit] button to exit.

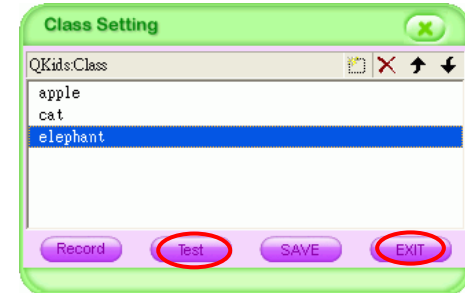



Create info for parent's relationship




1. Go back to **[Options]** page to enter [Relationship Setting] to create info for parent's relationship

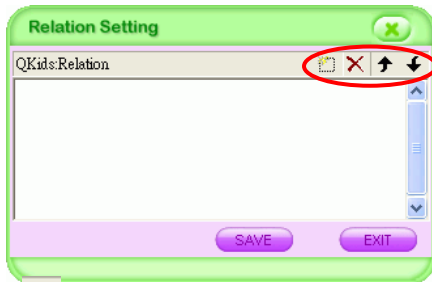


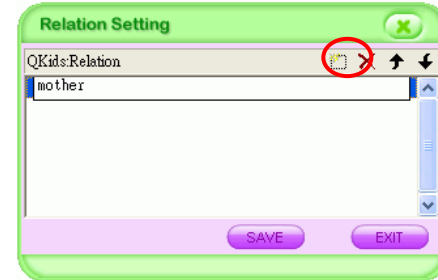
2. Entering Relationship Setting will get below page




-  : Add parent's relationship

-  : Delete parent's relationship
-  : Up shift parent's relationship in sequence
-  : Down shift parent's relationship in sequence
- [SAVE] : Save class's info and exit window
- [EXIT] : Exit Relation Setting window

3. Click  to add name of parent's relationship




4. After add all over, please make sure to click [SAVE] button to save info

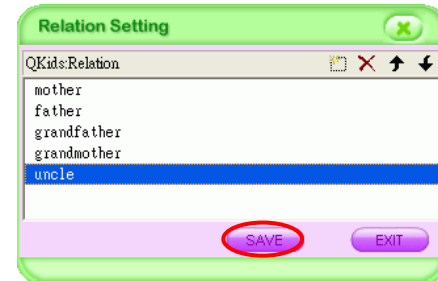


Create student's info


1. Click **【Database】** button to select page



2. After entering **【Database】** will get below window to click **【Add】** or Database page and right-click to select **【Add】** button to enter window of student's info.

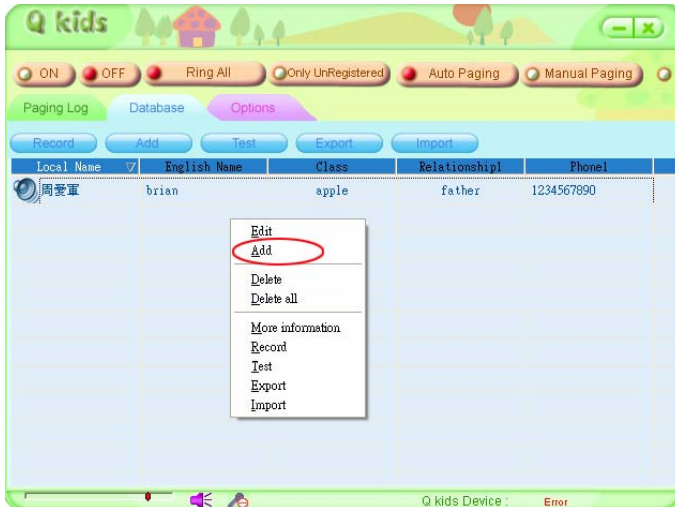

3. You can **【student information】** window as shown in below messages:

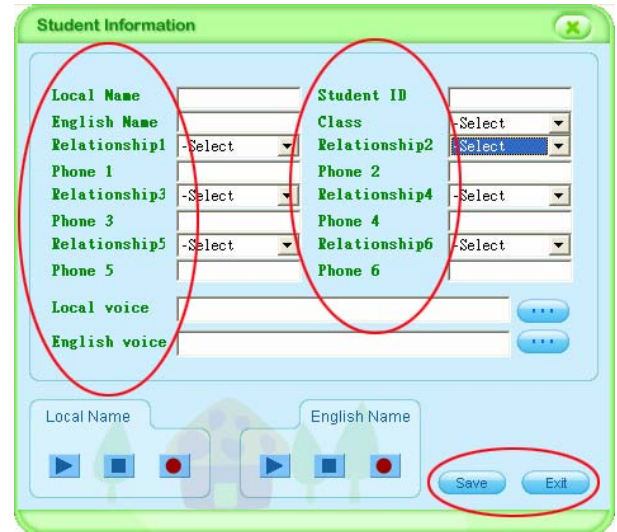

- Local Name : Local name for students
- English Name : English name for students
- Student ID : Serial number for students
- Class : Class name for student
- Relationship1~Relationship6 : Selection for parent's relationship
- Phone1~Phone6 : Phone number for parent's relationship
- Local voice : Voice path for local name
- English voice : Voice path for English name

- Local Name : Recording buttons for local name
 - English Name : Recording buttons for English name
 - [Save] : Store info
 - [Exit] : Leave window
4. Entering student's info, please entering information according to below indication. ◦


Student Information


Local Name	周愛軍	Student ID	001
English Name	brian	Class	Apple
Relationship1	father	Relationship2	-Select
Phone 1	1234567890	Phone 2	Apple
Relationship3	-Select	Relationship4	Banana
Phone 3		Phone 4	Here
Relationship5	-Select	Relationship6	-Select
Phone 5		Phone 6	
Local voice	C:\QKids203\English\Wav\StudentNameVoice\周愛軍 ...		
English voice	C:\QKids203\English\Wav\StudentNameVoice\周愛軍 ...		

Local Name: [Play] [Stop] [Record]


English Name: [Play] [Stop] [Record]




[Save] [Exit]

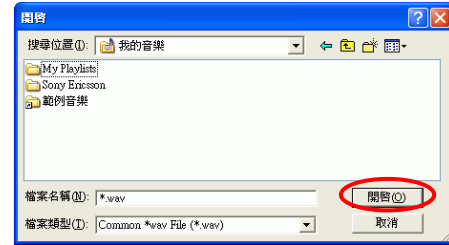5. Local voice and English voice path selection : If you have recorded local name and English name for students, you can click  button to connect voice path.

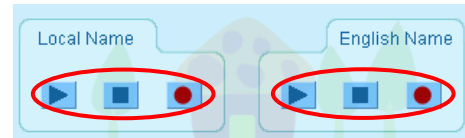

6. On **【student information】** window will have Local Name : Recording buttons for local name, English Name : Recording buttons for English name. We suggest you can fill with all information of students, then to record together in order to economize time for filling files. Button's function as shown in below:



-  : Start Recording
-  : Finish Recording
-  : Play Recording info

7. Recording voice for student's name, because we have created basic info for all students, so entering [Database] page again will get below window, now to click [Record] for recording together.

The screenshot shows the 'Q kids' main interface. At the top, there are control buttons: ON, OFF, Ring All, Only UnRegistered, Auto Paging, and Manual Paging. Below these are three tabs: 'Paging Loc' (circled in red), 'Database' (circled in red), and 'Options'. Under the 'Database' tab, there are buttons for 'Record', 'ADD', 'Test', 'Export', and 'Import'. A table lists student information with columns: Local Name, English Name, Class, Relation, and Phone. The table contains 15 rows of data. At the bottom, there is a status bar that reads 'Q kids Device : Error'.

Local Name	English Name	Class	Relation	Phone
許昇堯	Yao	cat	Father	0923476545
黃佳雯	Monica	apple	Mother	0930223293
尤秀文	Carol You	whale	Aunt	0928999657
陳婉婷	Tina	apple	Mother	0935678764
彭俊泰	BON	apple	Grandmother	0966345876
施凱仁	Kairen	cat	Grandmother	0928787654
周愛軍	Brian	bird	Uncle	09284568766
樂日華	Ken	whale	Aunt	0955798435
羅詩平	Alan	elephant	Father	09265478546
李文鴻	Hong Lee	cat	Mother	0132268997
蘇品煒	Alex Su	apple	Mother	0939625935

8. After Record will get below window, you can start to record step by step for students and please make sure to save info.




The screenshot shows the 'Student Name Record' window. It features a table with columns: Local Name, English Name, Class, Voice(LocalName), and Voice(Engl). Below the table are input fields for 'Local Name' and 'English Name', and a 'Student Name:' label. At the bottom, there are recording controls: a play button, a stop button, a red record button, and an 'EXIT' button. The 'Save' button is circled in red.

Local Name	English Name	Class	Voice(LocalName)	Voice(Engl)
許昇堯	Yao	cat		
黃佳雯	Monica	apple		
尤秀文	Carol You	whale		
陳婉婷	Tina	apple		
彭俊泰	BON	apple		
施凱仁	Kairen	cat		
周愛軍	Brian	bird		
樂日華	Ken	whale		
羅詩平	Alan	elephant		

System info processing

Picking up broadcasting records input and output

1. Output info of picking up records, on 【Paging Log】 page to click [Export] button or right-click on window to select Export, system will popup a dialog to remind you whether to export info of pickup up records, after select [(Y)], system will display save as path selection to click[(S)] button to finish exporting operation.

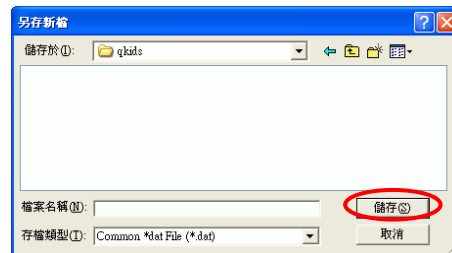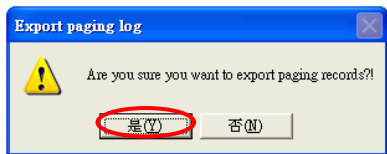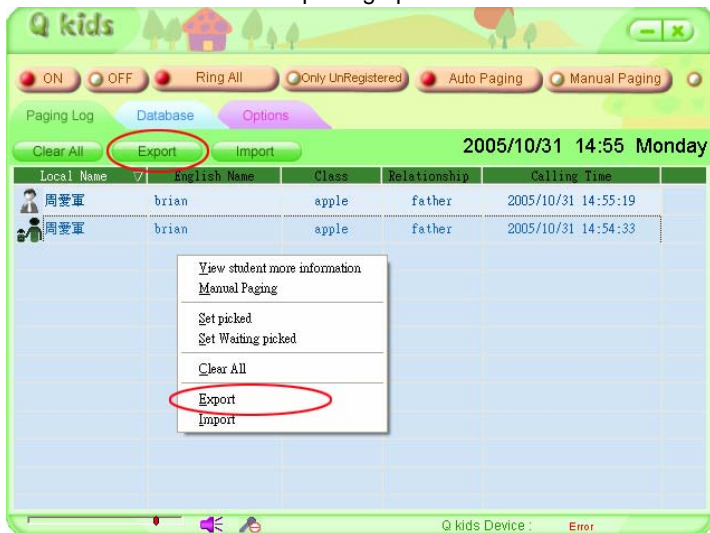

2. Enter info of picking up records on 【Paging Log】 page to click [Import] button or right-click to select Import, system will open window according to open path of displayed files to click [(O)] button will import student's info to system.




Clear picking up records

When you want to clear picking up records, please on **[Paging Log]** page to click [Clear All] button or right-click to





select Clear All, then system will display reminding window whether to clear picking up records, to select [(Y)] button in order for system clear picking up records on Paging Log window.

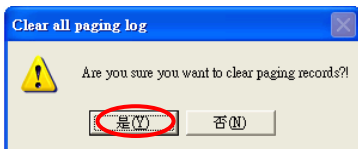


Input and output of student's info

1. Output student's info, on **[Database]** page to click [Export] button or right-click to select Export in order for system remind whether need to output student's info, after selecting [(Y)] button, system will display save as path selection and select [(S)] to finish output operation.

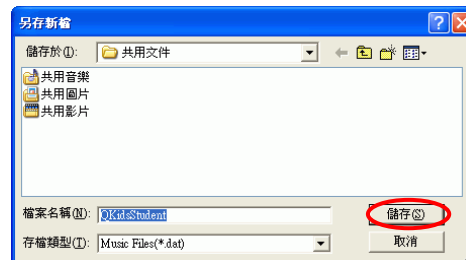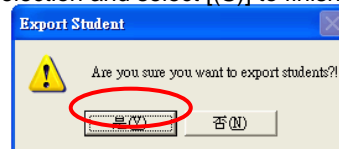


2. Input student's info, on **[Database]** page to click [Import] button or right-click to select Import, system will display selection window for opening path, after selecting to click[(O)] to input student's info to Qkids system.

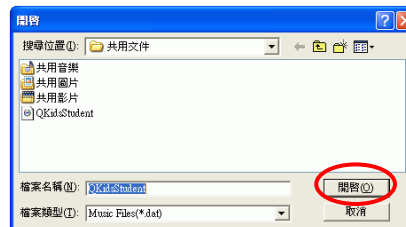


Search student's information

Right-click to enter searching student's info and select more information to enter student information page for searching, after searching over to click [Exit] to close window. If you want to modify at this place to click [Save] button for storing info and click [Exit] button to close window.

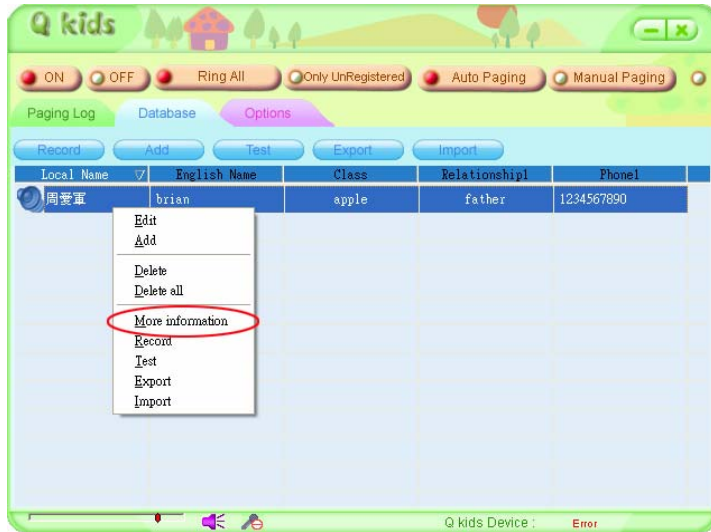



Modify student's information

Right-click to enter modifying and select [Edit] button to enter student information window for modifying, after modifying ok to click [Save] button for storing info and click [Exit] to close window.

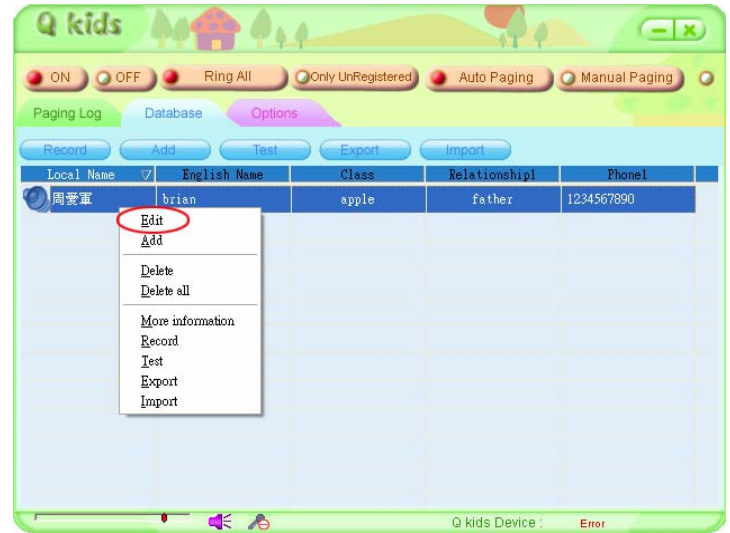

Delete student's info

Right-click to enter deleting student's info and select [Delete] button will popup a dialog to select [(Y)] button in order to finish operation for deleting student's info
Delete all stand for deleting all student's info.

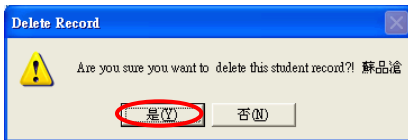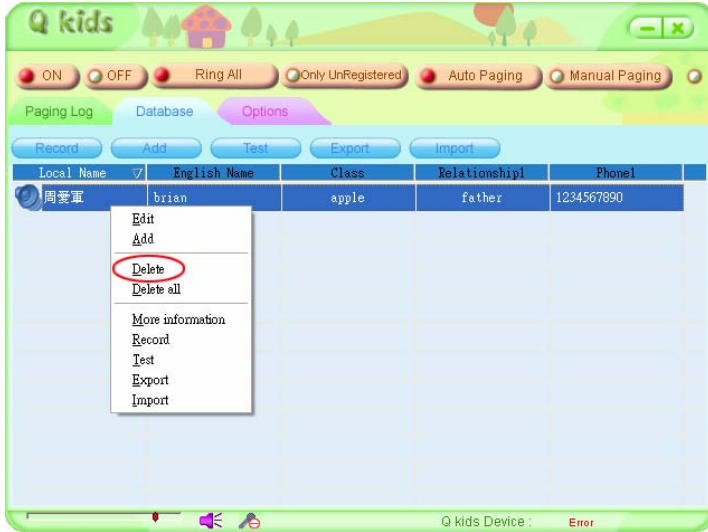

System function settings

1. Click 【Options】 button will get below messages.



2. After entering 【Options】 page, please according to instruction to set each function step by step.

Ring settings when incoming calls


When system is startup while there have incoming calls from parents, system can be set whether all rings on status or unregistered phone numbers to ring on.



1. All calls ring on:
 - Whatever what incoming calls will enable ring on.
2. Unregistered phone numbers ring on:
 - Only unregistered phone numbers will be ring on while incoming calls.

Mode settings for auto paging and manual paging

Due to different broadcasting device Qkids can be selected Auto paging and Manual paging, if indicator light in Red stand for on this mode status.



1. Auto Paging:
 - If there have amplifier system in kindergarten can use auto paging mode to play student's messages.
2. Manual Paging:
 - If there have no amplifier system in kindergarten can use manual paging mode according to corresponding

phone numbers to play or prepare via exchange system.

Open prompt of incoming calls in manual paging mode

During system startup incoming calls will not ring on, when you select [Manual Paging] mode, because of no auto paging. So Qkids system will ring on in order to make sure unforgettable via select below option.




Incoming messages of unregistered numbers

To select **Popup unregistered incoming calls**, if there have incoming calls of unregistered numbers, system will popup a reminding window to display unregistered phone numbers.

This window is used for avoiding parents to use unregistered numbers. When phone to dial line to result in auto paging in advance. When parents use unregistered phone to dial line, Qkids system will ring on at the same time, after picking up phone to confirm identification can switch Qkids system to [Database] page for searching student's info and broadcasting via manual paging mode.



Unregistered numbers will popup below reminding window :

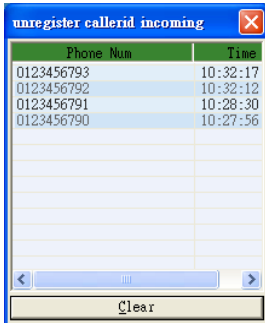

Flashing prompt of new incoming calls

When select **Alert new calls**, window will have flashing prompt while there have new incoming calls.



Flashing prompt messages like below:




Reminding voice of system ON and OFF

To select **Play Sound When System Starts** will play startup voice when system software run ON.

To select **Play Sound When System Ends** will play startup voice when system run OFF(end).






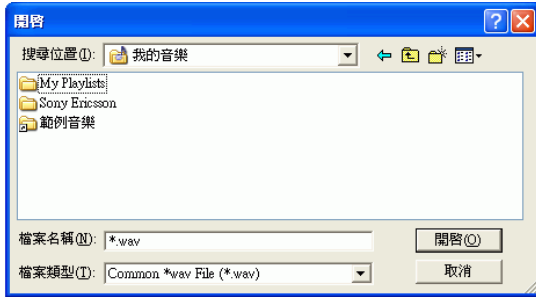

To select position of voice files via path  selection:

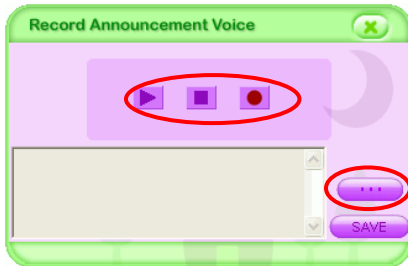

Record broadcasting contents of Announcement

Announcement Voice is content of system broadcasting or to select position of your required files via path *Buttons introduction as follows :*




-  : Start Recording
-  : Stop recording
-  : Play recording's info
-  : Import recorded info





! Cautions: Don't forget to click [SAVE] button for storing settings.


Set Contents of paging and play sequence

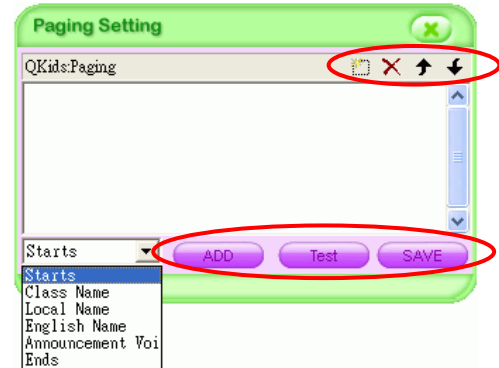Content of paging is used for broadcasting contents and sequence selection.

Instructions as follows:




-  : Add items of playing voice
-  : Delete items of playing voice
-  : Up shift sequence of playing voice
-  : Down shift sequence of playing voice
- [ADD] : Add items of playing voice
- [Test] : Test items of playing voice
- [SAVE] : Store settings
- ! Cautions: Don't forget to click [SAVE] button for storing settings.

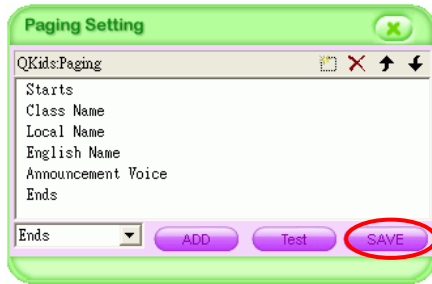

Voice settings for starting and finishing broadcasting

Paging starts sound is starting voice, please select [button] to get file's position of your required voice.

Paging ends sound is finishing voice, please select [button] to get file's position of your required voice.

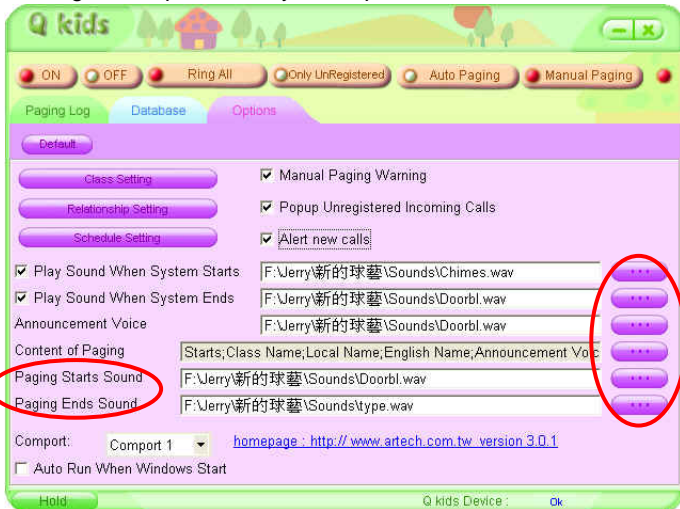

Getting file's position via [button] selection button.



Set system transmitting port(Comport)

Comport is used for system linking selection.



1. If COM connecting error will popup above window and display Qkids Device : "Error" on right corner.
2. If COM connecting ok will display Qkids Device : "OK" on right corner.

Set Qkids system auto run when windows start


Auto Run When Windows Start is used for auto run program when windows start and minimize window on right corner.



Set time schedule for system starts and finished.

Schedule Setting is used for system auto startup or manual startup and set auto startup time schedule.

1. On Option page to enter Schedule Setting will get below window.

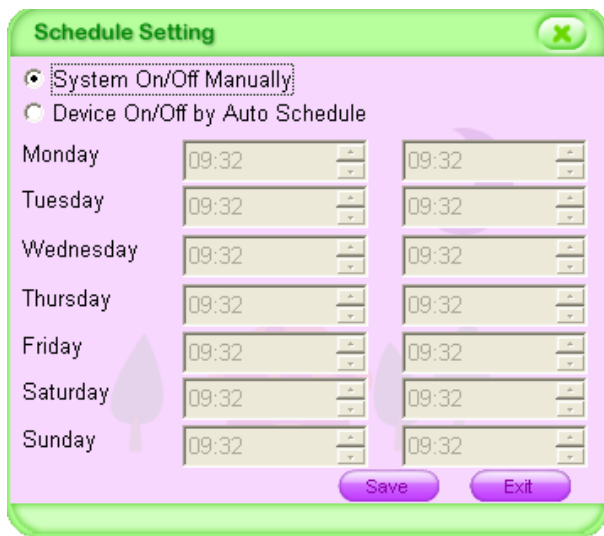


The screenshot shows a dialog box titled "Schedule Setting" with a close button (X) in the top right corner. It contains two radio button options: "System On/Off Manually" (which is selected) and "Device On/Off by Auto Schedule". Below these options is a table with seven rows, one for each day of the week (Monday through Sunday). Each row contains two time input fields, both of which are set to "09:32". Each input field has up and down arrow buttons. At the bottom of the dialog, there are two buttons: "Save" and "Exit".

Day	Start Time	End Time
Monday	09:32	09:32
Tuesday	09:32	09:32
Wednesday	09:32	09:32
Thursday	09:32	09:32
Friday	09:32	09:32
Saturday	09:32	09:32
Sunday	09:32	09:32

- **System On/Off Manually** : System must be manual startup if select this option.
- **Device On/Off by Auto Schedule** : System will be auto startup and closed according to time schedule if you select this option.

2. If select **Device On/Off by Auto Schedule** you can set time for system auto startup and close everyday.

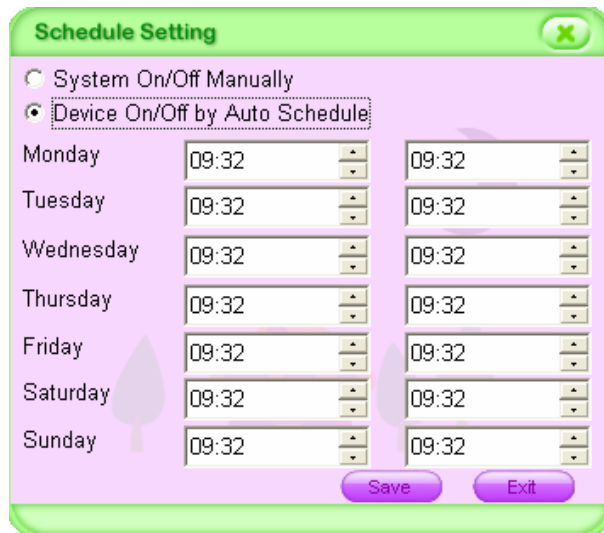

The screenshot shows the same "Schedule Setting" dialog box, but now the "Device On/Off by Auto Schedule" radio button is selected. The table below it is identical to the previous screenshot, with all time slots set to "09:32". The "Save" and "Exit" buttons are still present at the bottom.

Day	Start Time	End Time
Monday	09:32	09:32
Tuesday	09:32	09:32
Wednesday	09:32	09:32
Thursday	09:32	09:32
Friday	09:32	09:32
Saturday	09:32	09:32
Sunday	09:32	09:32


!Cautions: Don't forget to click [SAVE] button for storing settings.

Clear all voice paths of system

1. If you wanna to clear all voice paths to click Clear All button on **Options** page, then will popup below confirm window.



2. After select [(Y)], system will resume all voice paths to original defaults as follows.

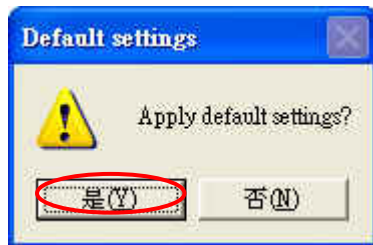


Test voice contents of students

On system [Off]status to select your required students for testing on **【Database】** page and click [Test] button will popup confirm window, then to click [(Y)] button, system will play voice contents of students via PC voice output port.




Qkids Auto Paging Mode

If kindergarten have amplifier system that can use auto paging mode, Qkids system will auto play student's content via amplifier system when there have incoming calls from parents.

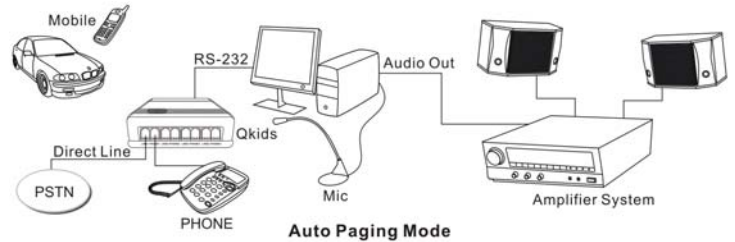

Set auto paging mode


Firstly to run Qkids software and set system to [On] status, then to select [Auto Paging] menu.

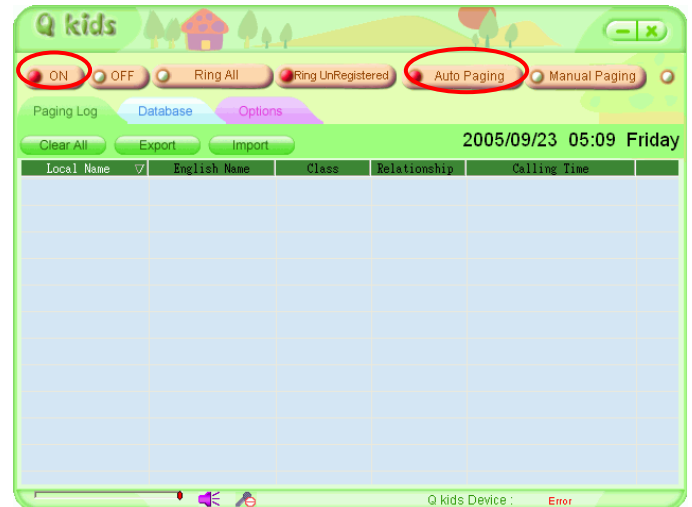


QKids Auto Paging Mode

1. If have incoming calls from parents, system will auto justify which parents wanna to pick up their children to display on 【Paging Log】 page and start broadcasting.


After broadcasting, original  status picture(Note 1)


will auto switch to  picture(Note 2), then teachers can help students to make preparation in order to pick up in time for their parents.




2. After finishing to right-click on student's info will popup menu, then to click [Mark Packed] button to set pickup up ok picture  (Note 3) °



Note 1 :  : Used for broadcasting status indication

Note 2 :  : Used for waiting for picking up and broadcasting over status indication.

Note 3 :  : Used for picking up ok status indication.






If one parent have two or more children go to the same kindergarten

1. If one parent have two or more children go to the same kindergarten, he only need to dial one call, Qkids system will auto search all student's info and play in sequence.




picture ◦



2. After broadcasting, original  picture(Note1) will auto switch  status picture(Note2), then teachers can help students to prepare for picking up. After picking up ok, teacher need to manual switch status picture to  (Note3).
3. Original  status picture will auto switch  status


- After picking up ok, right-click will popup menu to select [Mark Packed] in order to set picking up ok status



picture 

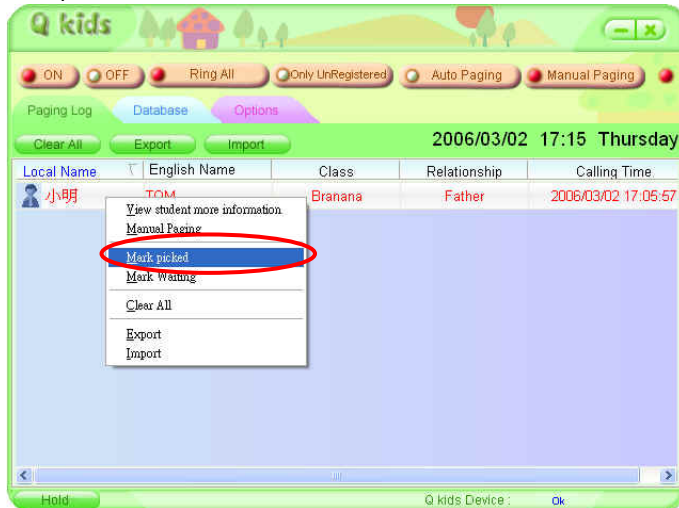

When parents pick up their children in kindergarten

- If parents pick up their children directly and not using making calls way, so you can look for student's name which parents wanna to pick up on Database page and

click  status picture, then system will popup a confirm window to click [(Y)] for student's broadcasting.

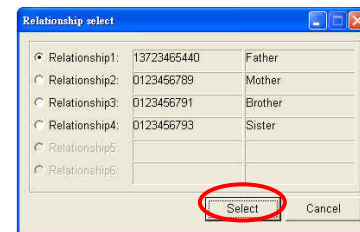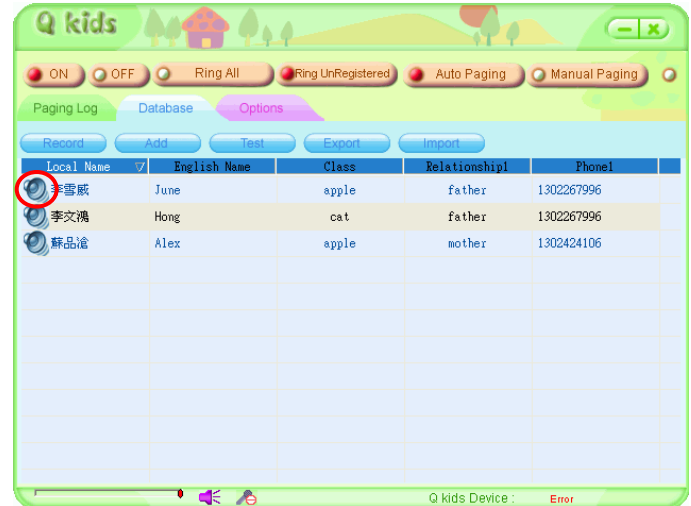


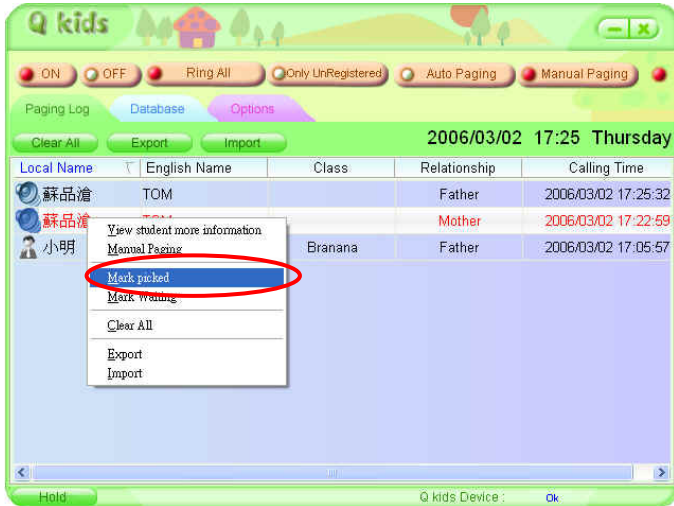
2. At the same time will display broadcasting in progress on 【Paging Log】 page.

Local Name	English Name	Class	Relationship	Calling Time
蘇品滄	Alex	apple	mother	2005/09/23 11:55:01
李雪威	June	apple	father	2005/09/23 05:52:51
李文鴻	Hong	cat	father	2005/09/23 05:52:51

3. After broadcasting, original status picture will auto switch status picture, then teachers can help students to prepare for their parents to pick up.


Local Name	English Name	Class	Relationship	Calling Time
蘇品滄	Alex	apple	mother	2005/09/23 11:55:01
李雪威	June	apple	father	2005/09/23 05:52:51
李文鴻	Hong	cat	father	2005/09/23 05:52:51

4. After picking up ok, right-click will get a menu to select [Mark Packed] button that you can set to pick up ok status picture .



If you wanna to second broadcasting for that student

1. If you wanna to make a second broadcasting for that


student you can click picture  or right-click on that student's info will popup menu to click [Manual Paging] button, then system will popup confirming window to click [(Y)] will be broadcasting for that student again.

2. Then on Paging Log page will display broadcasting for that student is in progress.

Local Name	English Name	Class	Relationship	Calling Time
李品倫	Alex	apple	mother	2005/09/23 12:13:31
李雪威	June	apple	father	2005/09/23 12:10:47
李文鴻	Hong	cat	father	2005/09/23 12:10:47

Qkids Manual Paging Mode

If there have no amplifier system in kindergarten can use manual paging mode via exchange system and can find out corresponding student's info in terms of phone numbers to use exchange system to make a preparation via manual way.

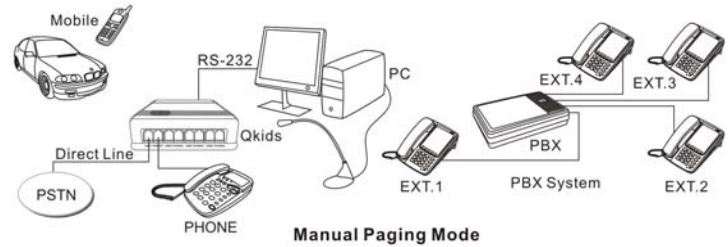

Set Manual Paging Mode

1. Firstly to run Qkids software and set system [On] status, then to click [Manual Paging] button.

2. Due to select manual paging mode, so Qkids system will not auto broadcasting for student's info when have incoming calls. Therefore, it must broadcast via other devices(such as exchange system line), please notes software situation in order to avoid incoming calls from parents, else will delay broadcasting to result in parent's inconvenient, so on system Option page to select "Manual Paging Warning " in order to ring on when have incoming calls on Qkids system so that as a prompt function.




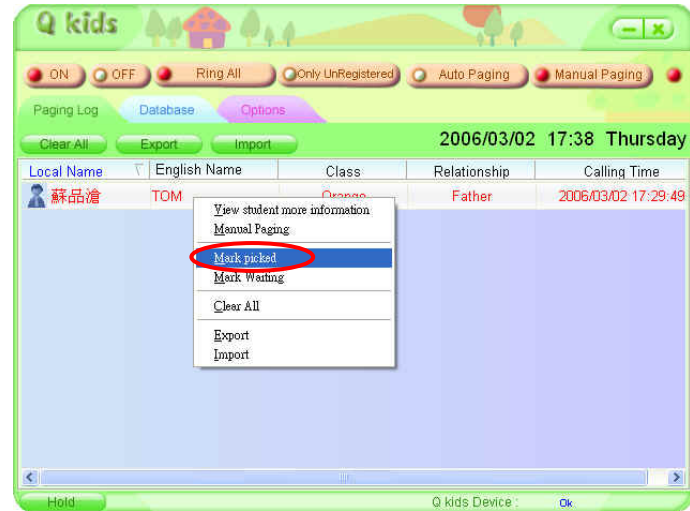
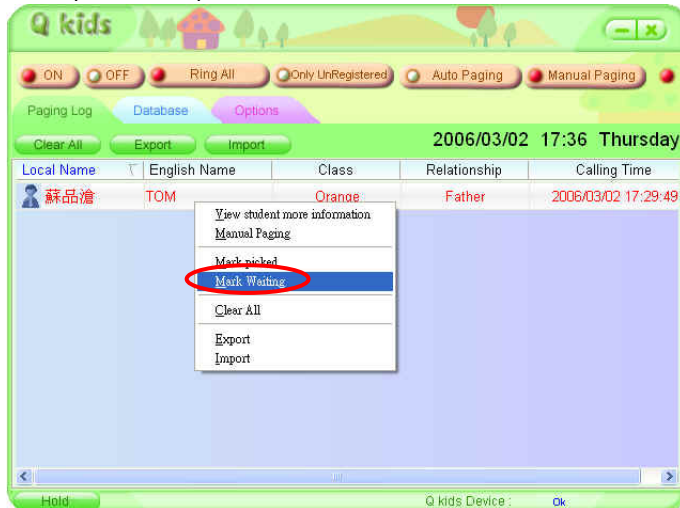
Using Manual Paging Mode

1. When there have incoming calls from parents, system will auto justify which parents wanna to pick up their children and will display on Paging Log page.




2. After incoming calls according to student's info via exchange system in kindergarten to inform teachers to help students to prepare for picking up. After manual broadcasting and right-click on student's info will popup functional selection to click [Mark Waiting] to set picking

up ok status picture .



3. After preparing to take students to outdoor so that to give their parents.
4. After picking up ok to right-click will get function menu, then to select [Mark Picked] button to set picking up ok

status picture .

When parents pick up their children directly


1. If parents picked up their children directly in kindergarten and not using incoming calls way, student's names can be searched on **【Database】** page, then to click



status picture, system will display student's info on Paging Log page.


Local Name	English Name	Class	Relationship	Phone
李雪威	June	apple	father	1302267996
李文福	Hong	cat	father	1302267996
蘇品澹	Alex	apple	mother	1302424106

2. After incoming calls according to student's info to inform teachers to prepare for students to pick up via exchange system and after manual paging ok to right-click on student's info will popup menu to click **〔 Mark Waiting 〕** to

set picking up ok status picture .

Local Name	English Name	Class	Relationship	Calling Time
蘇品澹	TOM	apple	Father	2006/03/02 17:29:49




3. After preparing to take students to outdoor so that to give their parents.
4. After picking up ok to right-click will get function menu, then to select [Mark Picked] button to set picking up ok status picture .


If one parent have two or more children go to the same kindergarten


1. If one parent have two or more children go to the same kindergarten, he only need to dial one call, Qkids system will auto search all student's info and display on Paging Log page.



2. After incoming calls according to student's info to inform teachers to prepare for students to pick up via exchange system and after manual paging ok to right-click on student's info will popup menu to click [Mark Waiting] to

set picking up ok status picture .

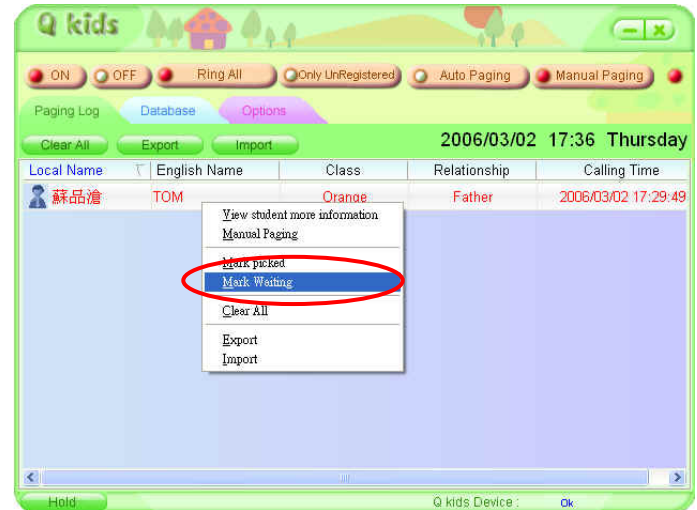

3. After preparing to take students to outdoor so that to give their parents.
4. After picking up ok to right-click will get function menu, then to select [Mark Picked] button to set picking up ok status picture .

